



Series 2011

Zetco Stainless Steel Globe Valve

FEATURES

MANUFACTURED IN TAIWAN (R.O.C.)

HEAVY PATTERN DESIGN

STAINLESS STEEL 316

INVESTMENT CASTING

NOT WATERMARKED AND NOT SUITABLE FOR INSTALLATIONS THAT
MUST BE AS/NZS 3500 COMPLIANT (DRINKING OR NON-DRINKING WATER)

SUITABLE FOR APPLICATIONS WHERE THROTTLING IS REQUIRED

ALL VALVES PRESSURE TESTED DURING PRODUCTION

SIZE RANGE: 15MM TO 50MM

PRESSURE AND TEMPERATURE RATINGS


TEMPERATURE RANGE: 0°C TO 200°C

MAXIMUM OPERATING PRESSURE AT NOMINAL TEMPERATURES: 1600 kPa


FOR RATINGS AT SPECIFIC TEMPERATURES REFER TO GRAPH OVERLEAF

Series 2011

Zetco Stainless Steel Globe Valve

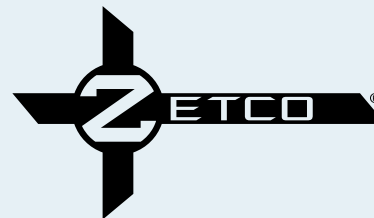

DIMENSIONAL AND COMPONENT DIAGRAM

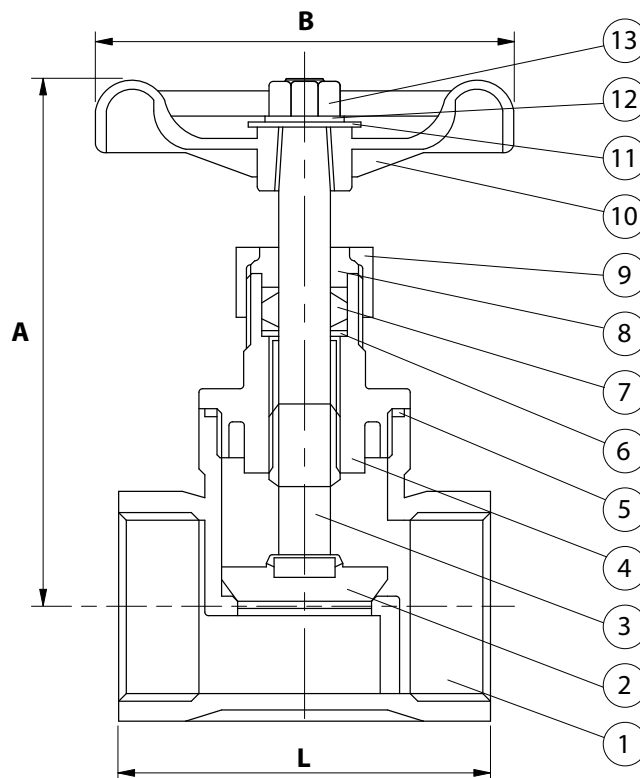

MATERIALS

POS.	PART NAME	MATERIALS
1	BODY	STAINLESS STEEL 316
2	DISC	STAINLESS STEEL 316
3	STEM	STAINLESS STEEL 316
4	BONNET	STAINLESS STEEL 316
5	GASKET	PTFE
6	WASHER	STAINLESS STEEL 304
7	STEM PACKING	PTFE
8	GLAND	STAINLESS STEEL 304
9	GLAND NUT	STAINLESS STEEL 316
10	HANDWHEEL	CAST IRON
11	DISC	ALUMINIUM
12	WASHER	STAINLESS STEEL 304
13	NUT	STAINLESS STEEL 304

DIMENSIONS - mm

Prod. Code	Size	A	B	L	Kv	Wgt kg
2011015	15	57	89	52	2.16	0.321
2011020	20	70	97	60	4.84	0.463
2011025	25	80	107	72	9.08	0.694
2011032	32	90	125	80	14.7	1.05
2011040	40	90	140	91	21.6	1.32
2011050	50	100	165	101	39.8	1.86

PRESSURE/TEMPERATURE DIAGRAM

